




DELCO WIRE AND CABLE LIMITED

AIRPORT LIGHTING CABLE 5KV NON-SHIELDED

Part No. 401028

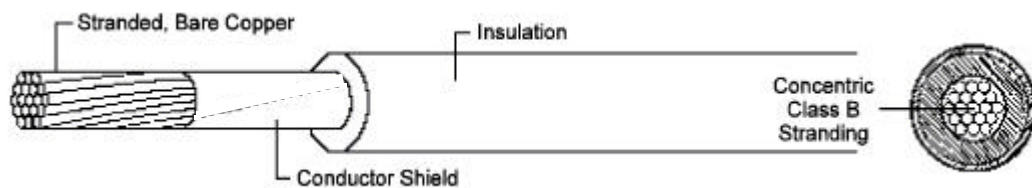

CONDUCTOR	1 Conductor 8 awg (7 x 0.0486") Stranded Bare Copper
CONDUCTOR DIAMETER	0.146" (3.71 mm)
CONDUCTOR SHIELD	Extruded Layer of Semi-Conductive Cross-linked Polyethylene
SHIELD THICKNESS	0.015" (0.38 mm)
INSULATION	Cross-linked Polyethylene
INSULATION THICKNESS	0.110" (2.79 mm)
DIAMETER	0.405" (10.29 mm) Nominal
CABLE WEIGHT	111.5 lbs/Mft (166 kgs/km)
STANDARD	FAA L-824 & ICEA S-66-524
CSA APPROVED	C22.2 #179.00
VOLTAGE RATING	5000 Volts
COLD IMPACT	-40°C
LOW TEMPERATURE FLEXIBILITY	-35°C
RECOMMENDED CONNECTOR KIT	AMERACE 54 SUPER KIT P/N 54SUPER D4-D4 AMERACE CLASSIC KIT P/N 54 D4-D4